
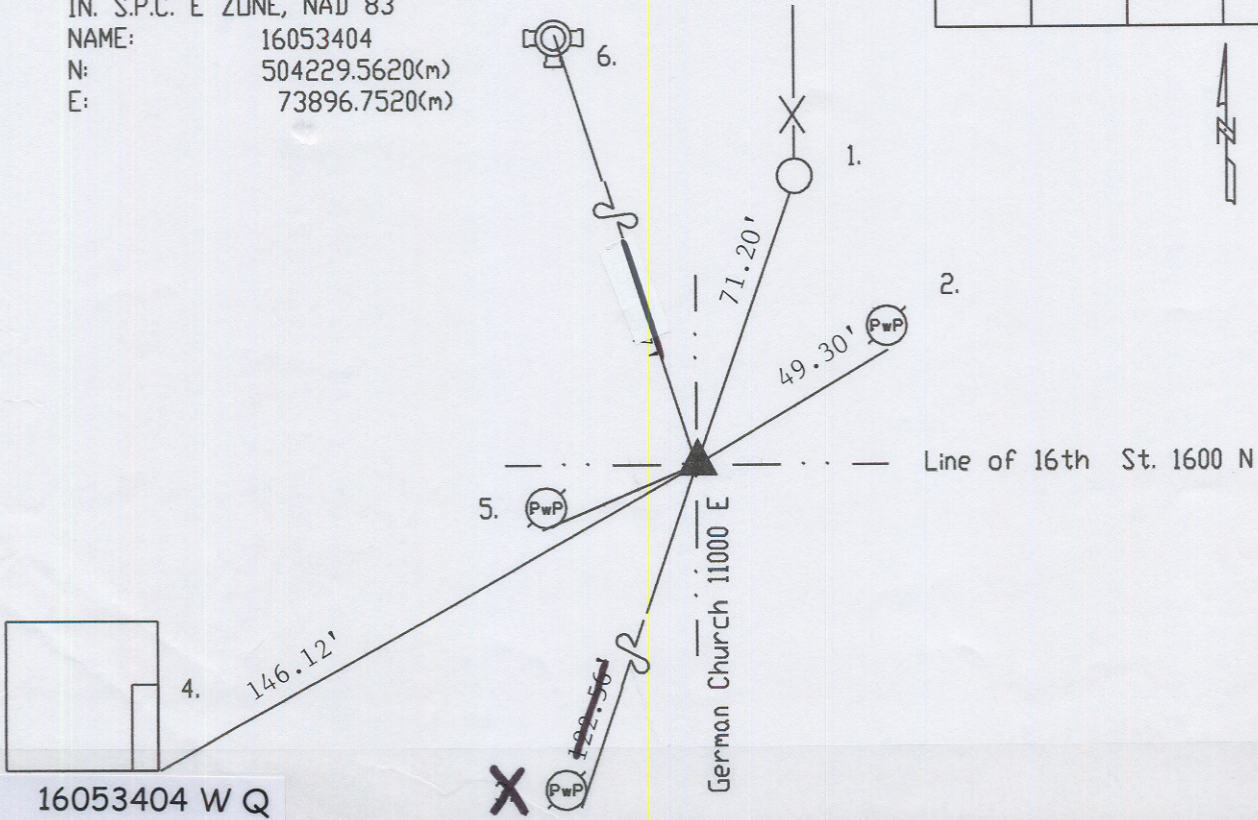


OFFICE OF THE MARION COUNTY SURVEYOR  
SECTION RECORD CORNER  
SECTION 34 TOWNSHIP 16 RANGE 5  
DATE: 6-30-97 -- 9-27-03  
PARTY CHIEF: Wilcoxon  
CREW: \_\_\_\_\_  
TYPE OF MARKER: Harrison (no cap)  
METHOD OF ESTABLISHMENT: County: 6-12-95

IN. S.P.C. E ZONE, NAD 83  
NAME: 16053404  
N: 504229.5620(m)  
E: 73896.7520(m)

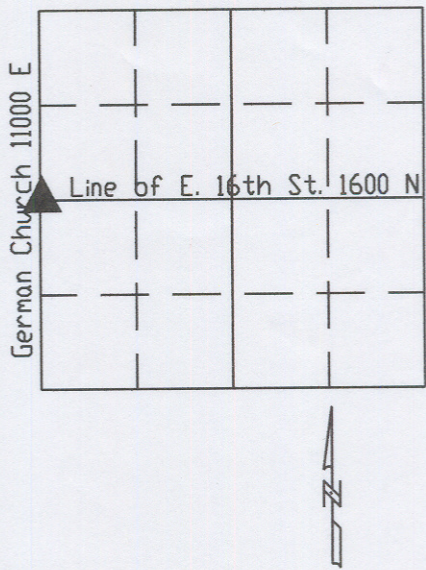

16053404 W Q

CORNER HISTORY: Corner originally set as a post in 1820 by John Hendricks with witness: 30" beech S 61 W 26 links; 8" dogwood N 50 E 22 links per Marion County Atlas pg. 15. A survey by D.B. Hosbrook on 5-20-1850 indicates no stone but witnesses: 18" beech S 70 1/2 W 63 1/2 links; 18" beech N 73 1/4 W 50 links per Warren Township Legal Survey Book pg. 12. Reference dated 8-30-61 by Fleener called a pipe over stone. Reference dated 8-9-63 called a pipe over stone. Reference dated 3-15-66 MCSO called pipe over stone. Reference dated 9-26-69 by McLand called a brass plug in steel box. Reference dated 4-8-75 by Fortner called a brass plug in steel box. Reference dated 7-18-88 by Gries called a brass plug in steel box. Reference dated 6-12-75 by Kiste called a brass plug in steel box. Reference dated 6-30-97 by Wilcoxon called excavated and set Harrison marker in position of brass plug.

REF.	DISTANCE	DESCRIPTION
1.	71.20'	Center of steel f.p. Fd
2.	49.30'	Rd S PwP#176-89B 48"up
3.		
4.	146.12'	SE #1543 brick
5.	41.40'	PK S PwP#38-481DB 24"up
6.	152.91'	Top nut